

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 001 348 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

17.05.2000 Bulletin 2000/20

(51) Int Cl.7: G06F 13/38

(21) Application number: 99660164.7

(22) Date of filing: 20.10.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 29.10.1998 FI 982353

(71) Applicant: NOKIA MOBILE PHONES LTD.  
02150 Espoo (FI)

(72) Inventors:

- Inkinen, Sami  
13100 Hämeenlinna (FI)
- Vapaakoski, Simo  
33680 Tampere (FI)

(74) Representative: Levlin, Jan Markus  
Berggren Oy Ab  
P.O. Box 16  
00101 Helsinki (FI)

(54) **A method for data communication between a wireless device and an electronic device, and a data communication device**

(57) The object of the invention is a particular memory card (8) mounted in a general purpose ATA expansion memory location (9) in a separate electronic device, such as a high-class digital camera (10), whereby the memory card contains a data communication feature for transmitting the memory contents to a mobile station (5). Expansion cards containing memory which can be written and read are called Compact Flash, in accordance with the Flash EEPROM memory contained in small-

sized cards. The data communication is performed on a short-range radio frequency LPRF link. The memory card (8) is also applicable for instance in a personal digital PDA notebook, where the input data can be stored in an expansion memory. The duplex feature of the expansion memory enables the data to be transmitted at a radio frequency to a mobile station. The data communication features of the wireless device (5) are available for forwarding the data.

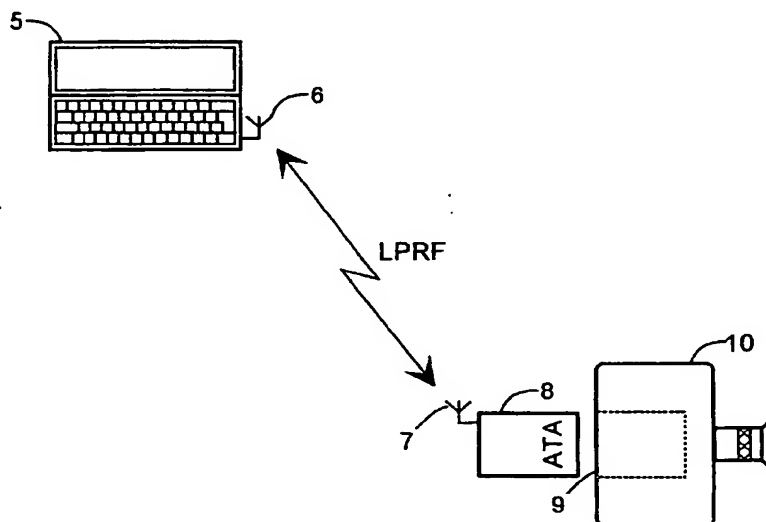


FIGURE 2

EP 1 001 348 A2

## Description

**[0001]** The object of the invention is an advantageous way to connect electronics equipment for instance to a mobile station via a standardised interface for short-range wireless data communication, and a data communication device connected to this standardised interface.

**[0002]** It is previously known to connect a portable computer and a mobile station 1 via an infrared (IR) link to a printer 4 shown in figure 1. Then an IR transmitter/receiver 2, 3 is constructed in the devices 1, 4 being parties of the data communication, and routines required by the data communication has been designed in the software of the devices 1, 4.

**[0003]** There are also known mobile communications applications developed particularly in connection with portable data processing equipment, such as laptop PCs. In these applications at least the transmitter/receiver functions of the mobile station are realised in a PC Card. A PC Card is an expansion card with an interface to the electronic device, such as a computer, which interface is defined by the PCMCIA standard (Personal Computer Memory Card International Association). For instance an expansion card containing a transmitter/receiver of a GSM mobile station is used for data communication in order to connect the electronic device to the GSM network. However, the use of the application requires pre-installed software in the electronic device.

**[0004]** There is also known a low power radio frequency (LPRF) or a short-range radio frequency link, which replaces a connection cable between electronic devices, and which is defined at least by the Bluetooth Special Interest Group. This concerns an unfinished industry standard where the communication link is intended to be realised at a vacant ISM frequency (Industrial, Scientific, Medical) of 2,45 GHz and at a power of 0 dBm or 1 mW, whereby the range is 10 meters and the data transmission rate is 721 kbit/s. The link uses frequency hopping and a time divided duplex connection. Reference: Codename Bluetooth, A Global Specification for Wireless Connectivity, Bluetooth Special Interest Group, www.bluetooth.com, 1988.

**[0005]** It is also known to expand the features of mobile stations with the aid of expansion cards. Then for instance a digital camera is connected to the mobile station.

**[0006]** A problem in known devices is that they require identification of the expansion card and co-operation in the electronic device. An electronic device connecting a mobile station to a cellular radio network requires special software for the data communication link and a sufficient processor capacity.

**[0007]** The object of the invention is to present a new method for realising the data communication between electronic devices and a wireless device, and a data communication device which can be connected to a general purpose expansion card interface. The data

communication device is particularly suited for electronic devices having insufficient processor capacity for the functions required by a data communication network. Further the use of the data communication device does not require preparations in the device to be connected, such as particular software for the data communication.

**[0008]** The invention relates to a method for wireless data communication between a wireless device, which comprises means for short-range data communication, and an electronic device. According to the invention the method comprises the following method steps:

- in the general purpose expansion memory location of the electronic device there is mounted a data communication device having means for short-range wireless data communication;
- the short-range wireless data communication link between the wireless device and the data communication device is activated; and
- data is transmitted between the data communication device and the wireless device.

**[0009]** The invention relates also to a data communication device for wireless data communication between a wireless device, which has means for a short-range data link, and an electronic device. According to the invention the data communication device comprises

- a controller, which can be connected to the general purpose interface of an expansion memory location of the electronic device for controlling the operation of the data communication device,
- a short-range wireless data communication unit and an antenna for data communication; and
- a memory for storing the communicated data.

**[0010]** According to the invention there is used a particular memory card, which is mounted in a general purpose expansion memory location of a separate electronic device, such as a digital camera, and which contains a data communication feature for transmitting the memory contents to a wireless device. A general purpose expansion memory location of this kind is defined for instance in the ATA (Attachment Interface) specification. Expansion cards containing memory which can be written and read are called Compact Flash, in accordance with the small-sized cards generally containing Flash EEPROM memory. The data communication utilises for instance a short-range radio frequency LPRF link. The memory card is also suitable for instance for a personal digital assistant (PDA), where the entered data can be stored in the expansion memory. Due to the duplex characteristic of the expansion memory the data can be also transmitted at a radio frequency to a wireless device, or generally to an LPRF device. The data communication characteristics of the wireless device are available for transmitting the data forward.

**[0011]** A data communication device according to the

invention is based on the use of a virtual duplex memory. The data communication device comprises memory, a short-range radio frequency link unit, and control logic. The memory is for instance Flash memory, RAM (Random Access Memory) or RAM memory with battery back-up. Regarding the operation of the electronic device the data communication device is used as ordinary expansion memory, but the data can be read and written also by an external device, such as by a mobile station using a short-range radio frequency link. The data communication is most preferably started automatically so that it is triggered by the storing of new data, but transmission is also possible so that it is activated by an external device.

**[0012]** The data communication according to the invention is suitable particularly for the transmission of digital pictures between a mobile station, such as a communicator or a smart phone, and a digital camera, but also for the transmission of data, such as the contents of a calendar, between a personal digital notebook or a portable computer and a mobile station.

**[0013]** An advantage of the invention is that the data communication device fits in a general purpose expansion memory location, whereby the electronic device, such as a camera, requires no hardware changes and also no software changes for the data communication. A general purpose expansion memory location is common in digital cameras, but the I/O ports (Input/Output) actually intended for data communication are not. Thus the method according to the invention enables the transmission of pictures to a separate device also from a camera which does not contain facilities for the transmission of pictures.

**[0014]** Another advantage of the invention is the wireless data communication in connection with a device having a processor capacity which is insufficient in order to realise the functions required for wireless data communication.

**[0015]** A further advantage of the invention is the extra memory which the data communication device provides to the electronic device in addition to the data communication characteristics.

**[0016]** Advantageous embodiments of the invention are presented in the dependent claims.

**[0017]** The invention is described in detail below with reference to the enclosed drawing, in which

Figure 1 shows a known arrangement for data communication between a mobile station and an electronic device;

Figure 2 shows an arrangement according to the invention for data communication between a mobile station and an electronic device;

Figure 3 shows a flow diagram of a method according to the invention for data communication between a wireless device and an electronic device;

Figure 4 shows a block diagram of a data communication device according to the invention;

Figure 5 shows a block diagram of the controller of a data communication device according to the invention; and

Figure 6 shows essential parts in a wireless device according to the invention.

**[0018]** Figure 1 was discussed above in the section regarding prior art.

**[0019]** Figure 2 shows an arrangement according to the invention where we can see a mobile station 5 and a camera 10. A data communication device 8 is mounted in the camera's 10 general purpose expansion memory location 9 for the storing and transmission of pictures. The wireless data communication between the wireless device 5 and the data communication unit 8 is made by a short-range radio link via the antennas 6, 7. The interface of the data communication device 8 to the camera 10 is for instance of the ATA type presented in the figure, and the short-range radio link is of the LPRF type.

**[0020]** Figure 3 shows in a flow diagram a method according to the invention for data communication between a wireless device and an electronic device. First a data communication device is mounted 11 in the electronic device. The installation is made by pushing a data communication device according to the invention into a general purpose expansion memory location of the electronic device. Regarding the electronic device the data communication device is to this end a common expansion memory card.

**[0021]** Data is input 12 to the electronic device. The input data is for instance a picture reflected as light through an objective, or a daily schedule created by the user. The data is processed 13 in the data communication device, for instance by storing the above input data into the data communication device mounted in the expansion memory location. The storing of data and any reading of data is made by particular instructions, such as ATA instructions. However, data input 12 or processing 13 is not performed if data is simultaneously transmitted by the wireless device to the electronic device.

**[0022]** The data communication link from the wireless device to the data communication device is activated 14. Data is transmitted 15 between the data communication device and the wireless device, most preferably automatically on the basis of the logic of the data communication device so that the transmission is activated when data is stored, whereby the data communication device has information about the receiving device, such as an address code, in order to perform the transmission. Alternatively the data is transmitted on the bases of instructions given by the wireless device. The data communication link from the wireless device to the data communication device is disconnected 16.

**[0023]** Figure 4 shows a block diagram of a data communication device 8 according to the invention. In the data communication device 8 there is seen a controller 17 connected to the general purpose expansion memory interface of the expansion memory location for controlling the operation of the data communication device, a short-range data communication link unit 18, such as a short range radio link LPRF unit, and an antenna 7 for the data communication, and a memory 19, such as a Flash memory or a RAM memory, for storing data. The LPRF unit contains for instance sections according to the Bluetooth industry standard, such as a radio unit, a link control and management unit, and software facilities. Other ways to realise the short-range link are for instance infrared (IR), acoustic ultrasonic data communication, and a wireless local area network (WLAN).

**[0024]** Figure 5 shows a more detailed block diagram of the controller 17 shown generally in figure 4, when the expansion memory interface is an ATA interface, and the short-range data communication link unit 18 is an LPRF unit. In the controller there is seen a microcontroller A, a serial to parallel converter B and a splitter C. The microcontroller A gives a busy signal BUSY to the electronic device when the memory 19 is processed by the radio link, and a signal ATA BUSY to the LPRF unit when the memory 19 is processed by the electronic device. Further there is given to the microcontroller a card operation enable (CE) signal A when the memory 19 is processed by the electronic device, and an LPRF BUSY signal when the LPRF unit 18 is occupied for data communication. To a man skilled in the art it obvious that in general a data communication device according to the invention comprises means for giving to the microcontroller an operation enable signal enabling the operation of the data communication device when the memory is processed by the electronic device, and a busy signal when the LPRF unit is occupied for data communication. The microcontroller A controls the series-parallel converter B and the splitter C. The serial to parallel converter B converts the memory's 19 parallel mode data into the serial mode used by the LPRF unit 18, and correspondingly it converts the serial mode into the parallel mode. The splitter C connects the memory's 19 parallel mode write and read connection alternatively to the ATA interface of the electronic device or to the serial to parallel converter B for the LPRF link.

**[0025]** Figure 6 shows a block diagram of such parts in a wireless device 5 according to the invention which are essential to the invention. In the mobile station 5 we can see a processor 21 for processing the normal operations and the data communication according to the invention, a memory 22 for storing the data of the data communication and the program, a display 23 for displaying program outputs, a keyboard 24 for using the data communication, an audio section 25 for speech facilities, a main transmitter/receiver 26 and an antenna 27 for normal traffic, and a short-range data communication transmitter/receiver 28 and antenna 29 for the data

communication, such as LPRF, between the wireless device 5 and the data communication device 10. The LPRF transmitter/receiver contains for instance sections according to the Bluetooth industry standard, such as a radio unit, a link control unit, and a link management unit and program functions.

**[0026]** As an example let us examine the transmission of pictures from a common digital camera to a mobile station of the communicator type. The camera has a Compact Flash expansion memory location with an ATA interface of a general type, a data communication unit according to the invention attached to it, and the mobile station has an LPRF interface. Pictures are taken with the camera and stored in the data communication unit in the same way as in a common expansion memory. The mobile station activates the LPRF communication link of the data communication unit and requests transmission of the stored data to the mobile station. The memory of the data communication unit is allocated to the LPRF link and the data transmission to the mobile station is started. However, no information is conveyed to the camera about the operation, because from the viewpoint of the camera the data communication unit is only an expansion memory. However, if the camera tries to process the expansion memory during the LPRF data transmission, this is not possible as it is prevented by a busy signal so that data can not be changed when another processes it. In this way consistent memory contents are maintained.

**[0027]** When the pictures have been transmitted to the mobile station the features and the capacity of the data communication network can be used to forward the pictures. Thanks to the LPRF link and the wireless device an electronic device such as a digital camera, has thus a world-wide range for the transmission of the pictures.

**[0028]** In this context an electronic device means some other device than a wireless device being one party in the data communication and having the means required by the short-range data communication link. Further a wireless device means most preferably a mobile station, but also any other device used for wireless data communication. A mobile station is particularly suitable due to the possible dual utilisation of the antenna and the radio frequency sections. The sections can be used both for normal traffic and for short-range data communication. Such mobile stations operating on two frequency bands are generally known in GSM systems.

**[0029]** As another example let us examine the transmission of the camera's pictures, in a manner according to the invention, to a common electronic device, such as a printer having the means required by the short-range data communication. Then the camera has a data communication unit according to the invention, and when a picture is stored in the camera it causes the transmission of the picture to another electronic device. Thus the contents of the expansion memory is kept the same at least in a unidirectional sense, and the camera

pictures are available for instance to a printer, for instance for immediate printing.

[0030] The invention is not limited to relate only to the above presented embodiment examples, but many modifications are possible within the inventive idea defined by the claims.

## Claims

1. A method for wireless data communication between a wireless device, which comprises means for short-range data communication, and an electronic device, **characterised** in that the method includes the following method steps:
  - in a general purpose expansion memory location of the electronic device there is mounted a data communication device having means for short-range wireless data communication;
  - a short-range wireless data communication link between the wireless device and the data communication device is activated; and
  - data is transmitted between the data communication device and the wireless device.
2. A method according to claim 1, **characterised** in that in order to enable the data transmission from the electronic device to the wireless device the following method steps are performed after the installation of the data communication device and before the activation of the data communication link:
  - data is input to the electronic device; and
  - the data is processed in the data communication device installed in an expansion memory location.
3. A method according to claim 2, **characterised** in that the data processing in the data communication device is made by instructions from the electronic device.
4. A method according to claim 1, **characterised** in that the data communication between the data communication device and the wireless device is made over an LPRF link.
5. A method according to claim 1, **characterised** in that the data communication between the data communication device and the wireless device is made on the basis of instructions given by the wireless device.
6. A method according to claim 1, **characterised** in that the data communication between the data communication device and the wireless device is made automatically on the basis of the logic of the data
- communication device so that it is activated by the storage of data.
7. A method according to claim 2, **characterised** in that the input data is a picture reflected as light through the objective of a camera.
8. A communications device for wireless data communication between a wireless device, which has means for a short-range data link, and an electronic device, **characterised** in that the data communication device comprises:
  - a controller connectable to a general purpose interface of an expansion memory location of the electronic device, for controlling the operation of the data communication device,
  - a short-range wireless data communication unit and an antenna for data communication; and
  - a memory for storing the communicated data.
9. A data communication device according to claim 8, **characterised** in that the controller of the data communication device comprises:
  - a serial to parallel converter for converting parallel mode information of the memory into serial mode used by the short-range data communication unit, and correspondingly the serial mode information into the parallel mode;
  - a splitter for connecting a parallel mode write and read connection of the memory alternatively to the interface of the expansion memory location of the electronic device or to the serial to parallel converter for a short-range data communication link; and
  - a microcontroller for controlling the serial to parallel converter and the splitter.
10. A data communication device according to claim 8, **characterised** in that the short-range data communication unit is a LPRF unit.
11. A data communication device according to claim 10, **characterised** in that it comprises means for supplying a busy signal to the electronic device when the memory is processed by the radio link, and a busy signal to the LPRF unit when the memory is processed by the electronic device.
12. A data communication device according to claim 10, **characterised** in that it comprises means for giving to the microcontroller
  - an operation enable signal enabling the operation of the data communication device when the memory is processed by the electronic device, and

- a busy signal when the LPRF unit is occupied for data communication.

5

10

15

20

25

30


35

40

45

50

55

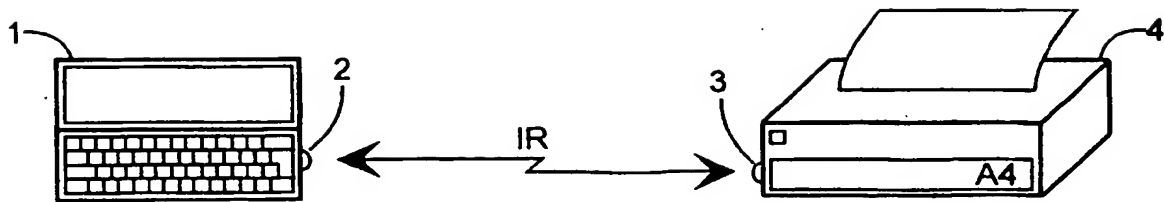

PRIOR ART

FIGURE 1

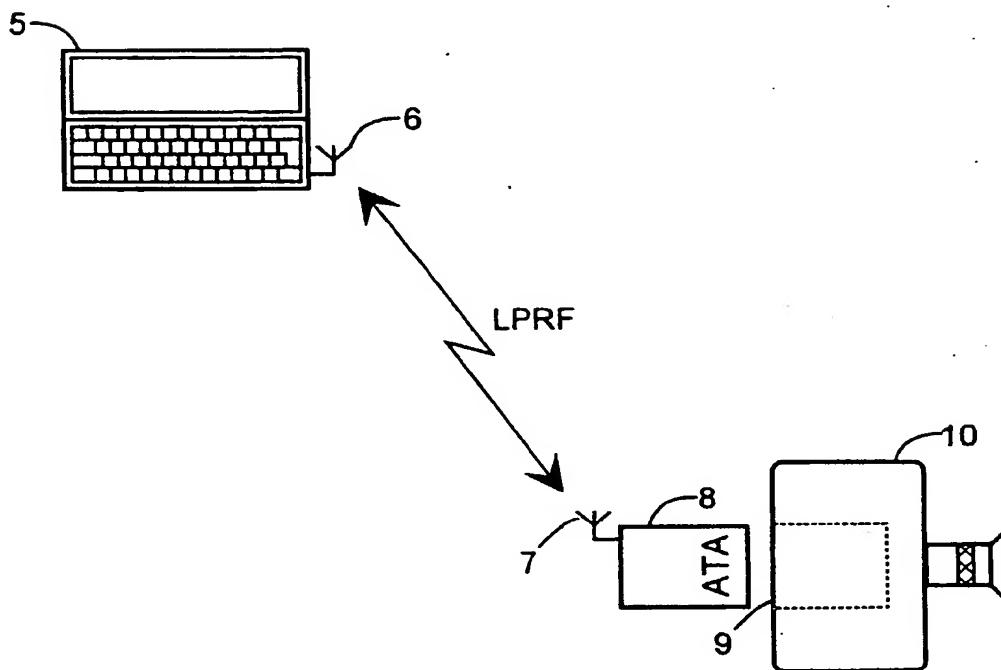


FIGURE 2

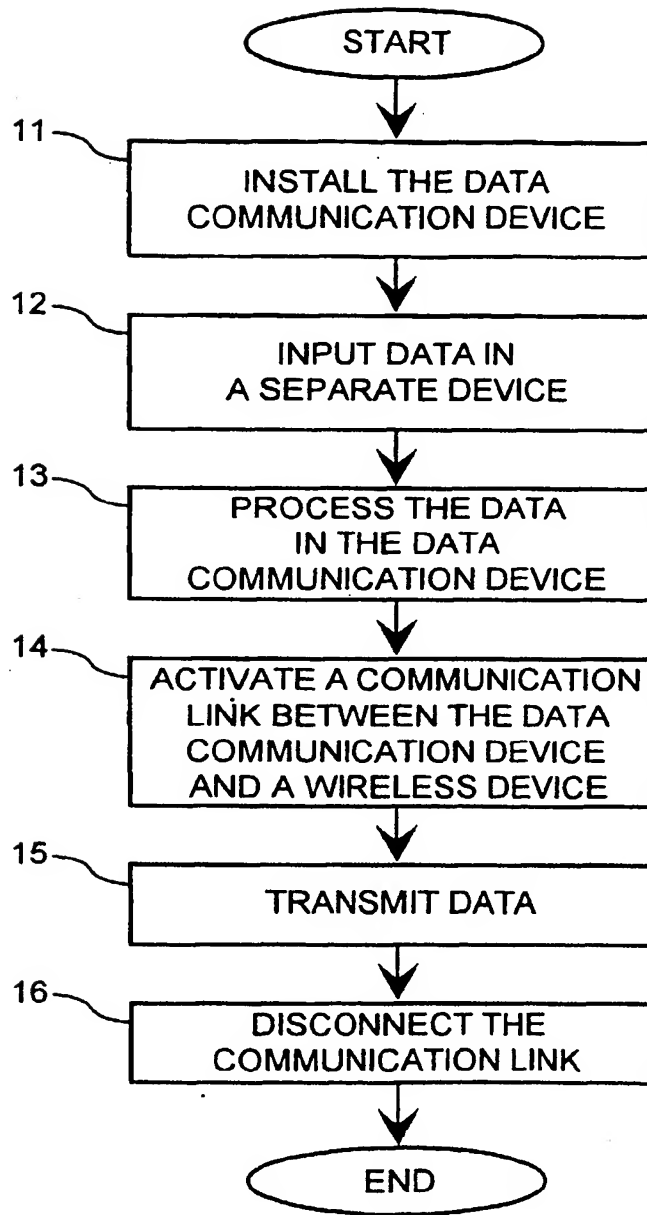


FIGURE 3



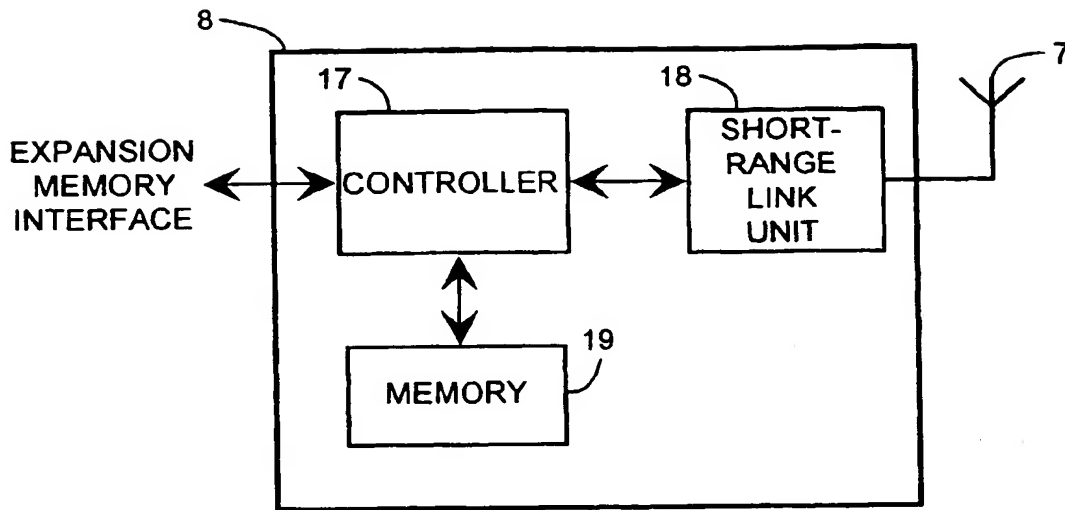


FIGURE 4

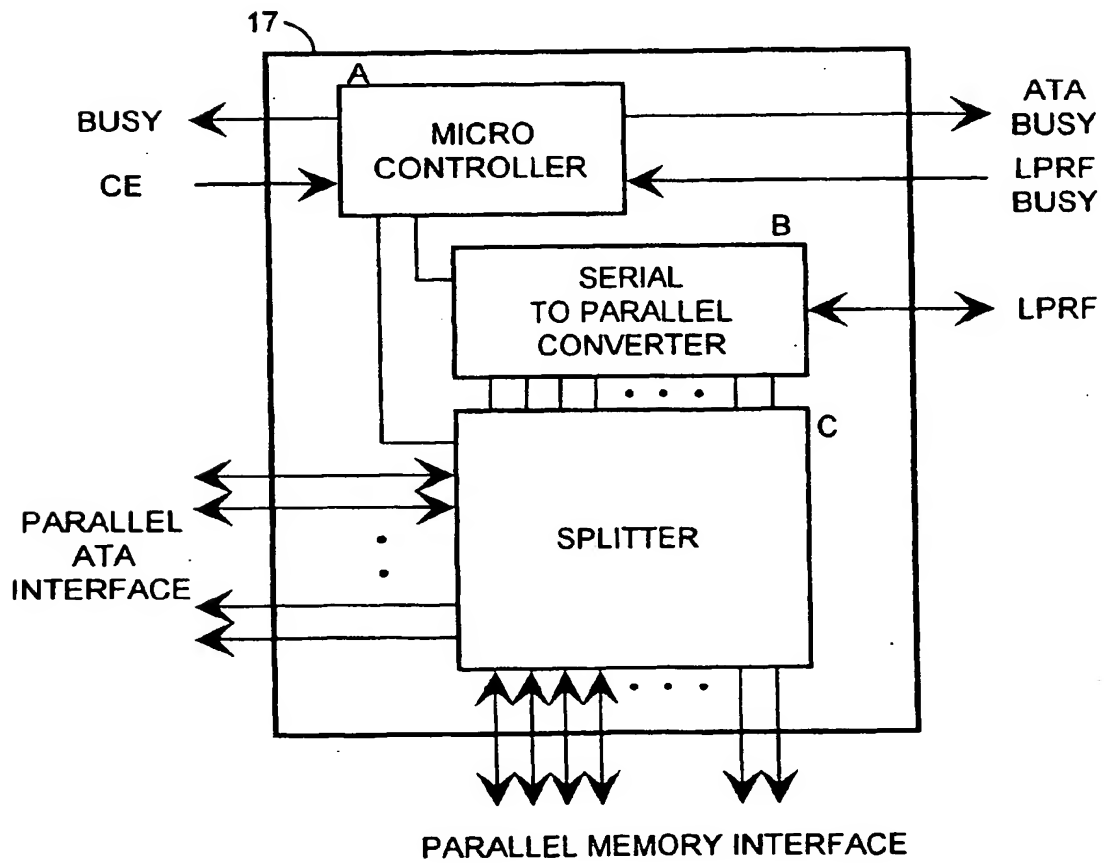


FIGURE 5

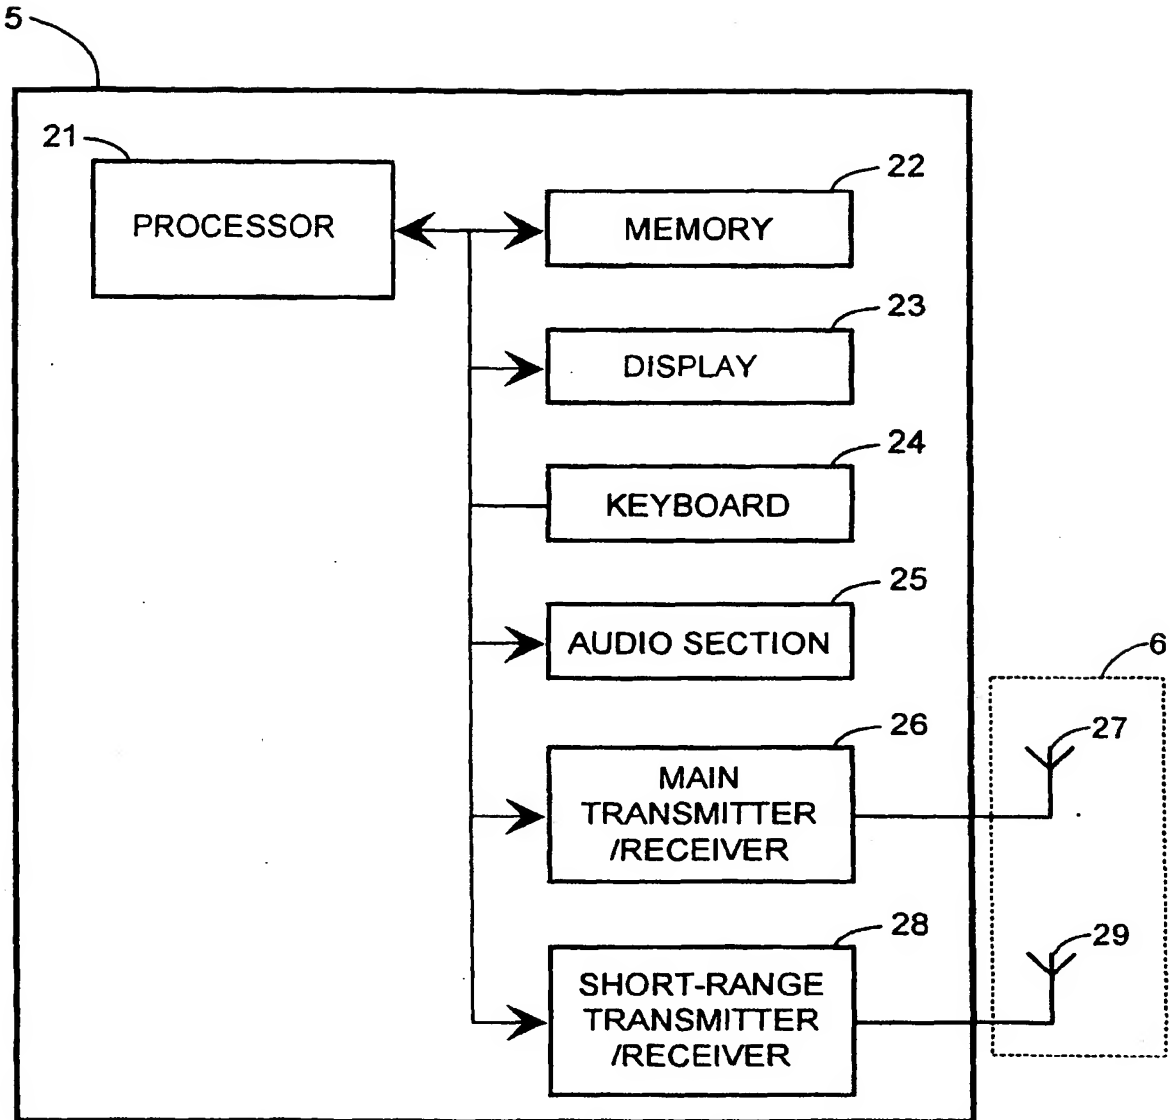


FIGURE 6

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 001 348 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
26.06.2002 Bulletin 2002/26

(51) Int Cl.7: **G06F 13/38**

(43) Date of publication A2:  
17.05.2000 Bulletin 2000/20

(21) Application number: **99660164.7**(22) Date of filing: **20.10.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Inkinen, Sami**  
13100 Hämeenlinna (FI)  
• **Vapaakoski, Simo**  
33680 Tampere (FI)

(30) Priority: **29.10.1998 FI 982353**


(74) Representative: **Levlin, Jan Markus**  
**Berggren Oy Ab,**  
**P.O. Box 16**  
**00101 Helsinki (FI)**

(71) Applicant: **Nokia Corporation**  
02150 Espoo (FI)

(54) **A method for data communication between a wireless device and an electronic device, and a data communication device**

(57) The object of the invention is a particular memory card (8) mounted in a general purpose ATA expansion memory location (9) in a separate electronic device, such as a high-class digital camera (10), whereby the memory card contains a data communication feature for transmitting the memory contents to a mobile station (5). Expansion cards containing memory which can be written and read are called Compact Flash, in accordance with the Flash EEPROM memory contained in small-

sized cards. The data communication is performed on a short-range radio frequency LPRF link. The memory card (8) is also applicable for instance in a personal digital PDA notebook, where the input data can be stored in an expansion memory. The duplex feature of the expansion memory enables the data to be transmitted at a radio frequency to a mobile station. The data communication features of the wireless device (5) are available for forwarding the data.

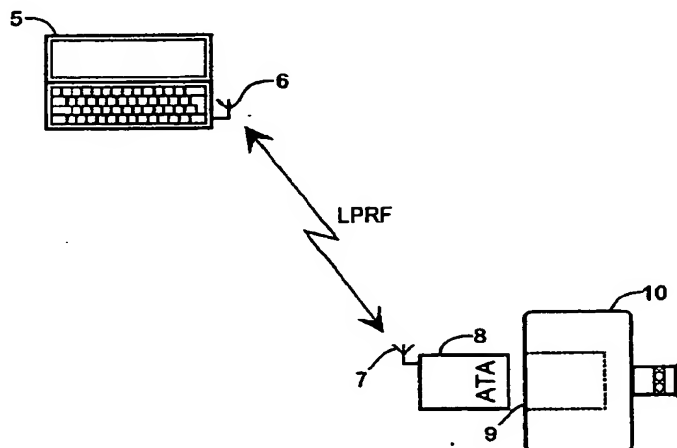**FIGURE 2****EP 1 001 348 A3**



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 99 66 0164

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 297 11 698 U (DOSCH & AMAND GMBH & CO KG) 4 September 1997 (1997-09-04) * page 1, paragraph 2 * * page 2, paragraph 3 * ---	1,3,4,8, 10	G06F13/38
X	DE 196 12 203 C (SIEMENS AG) 11 December 1997 (1997-12-11) * the whole document * ---	1,3,4,8, 10	
X	EP 0 763 939 A (SEL ALCATEL AG) 19 March 1997 (1997-03-19) * column 2, line 29 - line 53 * * column 3, line 17 - line 22 * * figure 18 * ---	1,3,4,8, 10	
X	US 5 765 027 A (SHI CHIH-CHUNG ET AL) 9 June 1998 (1998-06-09) * abstract; figure 1 * ---	1-3,5,6	
A	US 5 646 635 A (COCKSON MARK G ET AL) 8 July 1997 (1997-07-08) * column 1, paragraph 2 * ---	1-12	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 11, 30 September 1998 (1998-09-30) & JP 10 164171 A (NIPPON DENKI IDO TSUSHIN KK), 19 June 1998 (1998-06-19) * abstract * ---	1-12	G06F
A	EP 0 860 980 A (EASTMAN KODAK CO) 26 August 1998 (1998-08-26) * abstract * -----	1-12	
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>2 May 2002</b>	Examiner <b>Juenger, B</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... A : member of the same patent family, corresponding document</p>			

EP FORM 1503 03-02 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 66 0164

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-05-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 29711698 U	04-09-1997	DE 29711698 U1	04-09-1997
		AT 202443 T	15-07-2001
		DE 59800895 D1	26-07-2001
		DK 993748 T3	03-09-2001
		WO 9902002 A1	14-01-1999
		EP 0993748 A1	19-04-2000
		ES 2158691 T3	01-09-2001
		JP 2000516076 T	28-11-2000
		PT 993748 T	28-09-2001
DE 19612203 C	11-12-1997	DE 19612203 C1	11-12-1997
EP 0763939 A	19-03-1997	DE 19534450 A1	20-03-1997
		AU 714263 B2	23-12-1999
		AU 6442696 A	20-03-1997
		CA 2185580 A1	17-03-1997
		EP 0763939 A2	19-03-1997
		JP 9191451 A	22-07-1997
US 5765027 A	09-06-1998	NONE	
US 5646635 A	08-07-1997	AU 4690896 A	12-03-1997
		BR 9510634 A	27-04-1999
		DE 69512802 D1	18-11-1999
		DE 69512802 T2	17-02-2000
		EP 0845159 A1	03-06-1998
		IL 119079 A	01-06-2000
		JP 11511310 T	28-09-1999
		WO 9707557 A1	27-02-1997
JP 10164171 A	19-06-1998	NONE	
EP 0860980 A	26-08-1998	EP 0860980 A2	26-08-1998
		JP 10304292 A	13-11-1998
		US 2001019359 A1	06-09-2001
		US 2001028474 A1	11-10-2001
		US 2001012066 A1	09-08-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

This Page Blank (uspio)